



# Assembly instructions for the double doors

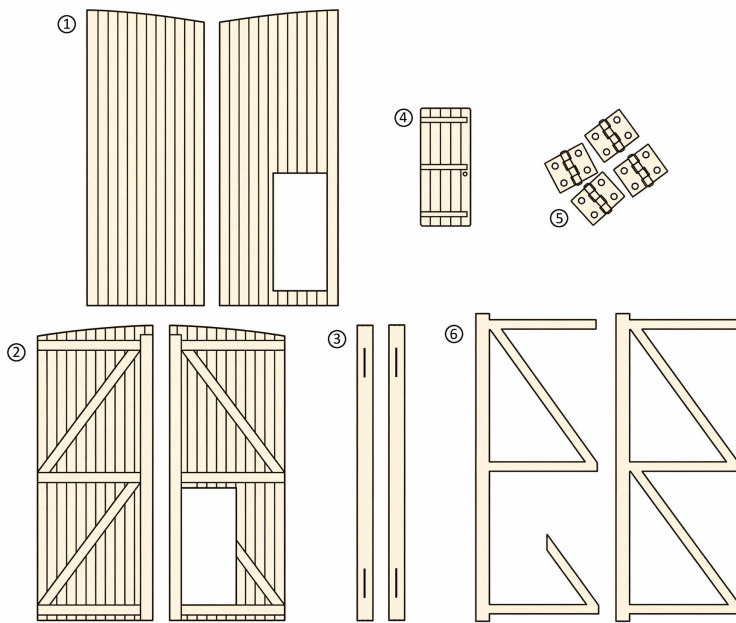


Most parts are crafted from laser-cut plywood, which may result in smoke marks on the wood's surface. A light sanding with 220-240 grit sandpaper is recommended.

- ① Outer door side (2)
- ② Inner door side (2)
- ③ Frame for hinges (2)
- ④ Access door
- ⑤ Miniature hinge (4)
- ⑥ Door detailing (2)

Place two miniature hinges ⑤ into each frame slot ③, ensuring that both hinges face the same direction.

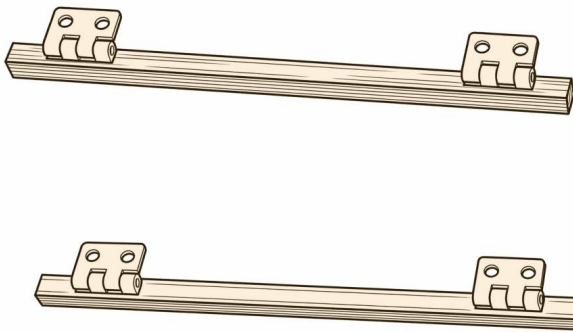


The slots in the frames have been cut from both sides and should slide into place with gentle pressure and do not require any glue at this stage.

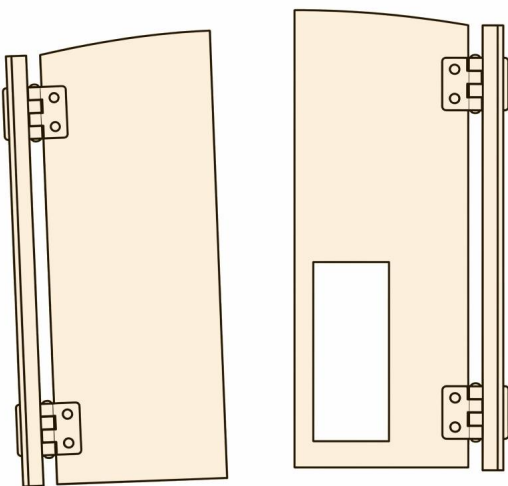


The cut-outs on the outer doors ① should be scraped clean with a knife blade to ensure a clean surface for better adhesion of the super-glue.

Super-glue the hinges of each frame to the cut-outs in the outer doors ①, making sure the knuckle of the hinges face forward (see illustration)


Take care not to use too much super-glue, as it could prevent the hinge from moving smoothly.

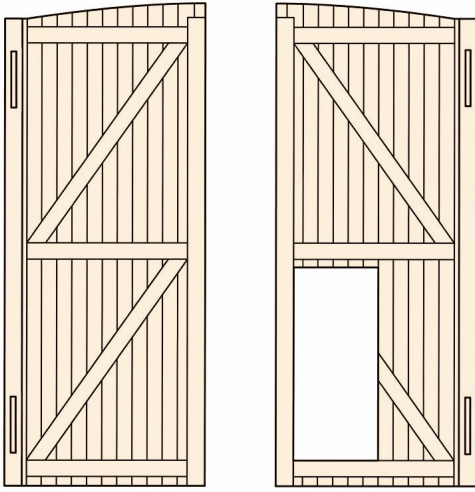

With the hinges in the closed position, bond the inner doors ② together with PVA glue.

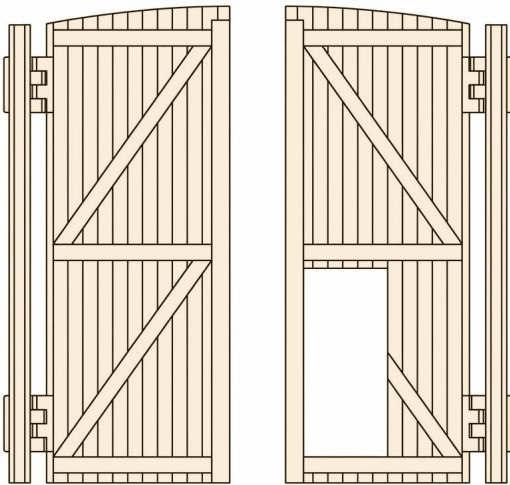

Move the hinges to the open position while the glue sets.

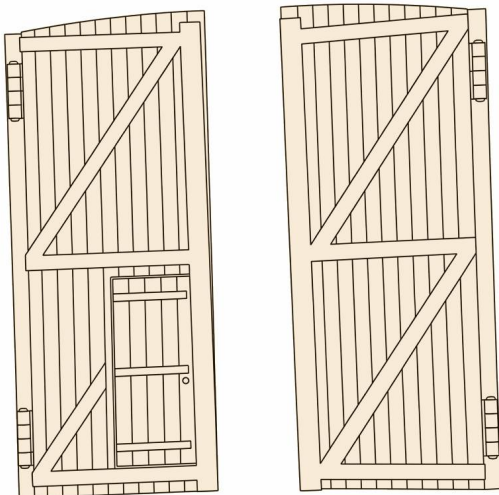

Attach the door detailing ⑥ to the finished doors, taking care not to use too much glue (or diluted glue), as this can cause the thin veneer to curl.

Glue the access door ④ in either the open or closed position, as preferred.